

FACT SHEET
Arecibo Harbor PR
Operation and Maintenance
Congressional Districts: N/A

1. DESCRIPTION

Arecibo Harbor consist of an entrance channel 25 feet deep, 400 feet wide, flared to 650 feet wide at ocean entrance and widened for inner 650 feet to form a maneuvering area of the same depth, and 900 feet wide fronting the proposed deep-water terminal. Also, the project authorization includes a stone breakwater 1,200 feet long between Point Morrillos and Cocinera Rock.

2. FUNDING


Allocation for FY15	\$0
President's Budget FY16	0

3. SPONSOR

Puerto Rico Ports Authority

4. STATUS

Maintenance dredging contract was awarded in August 2012. The construction was completed in November 2012.

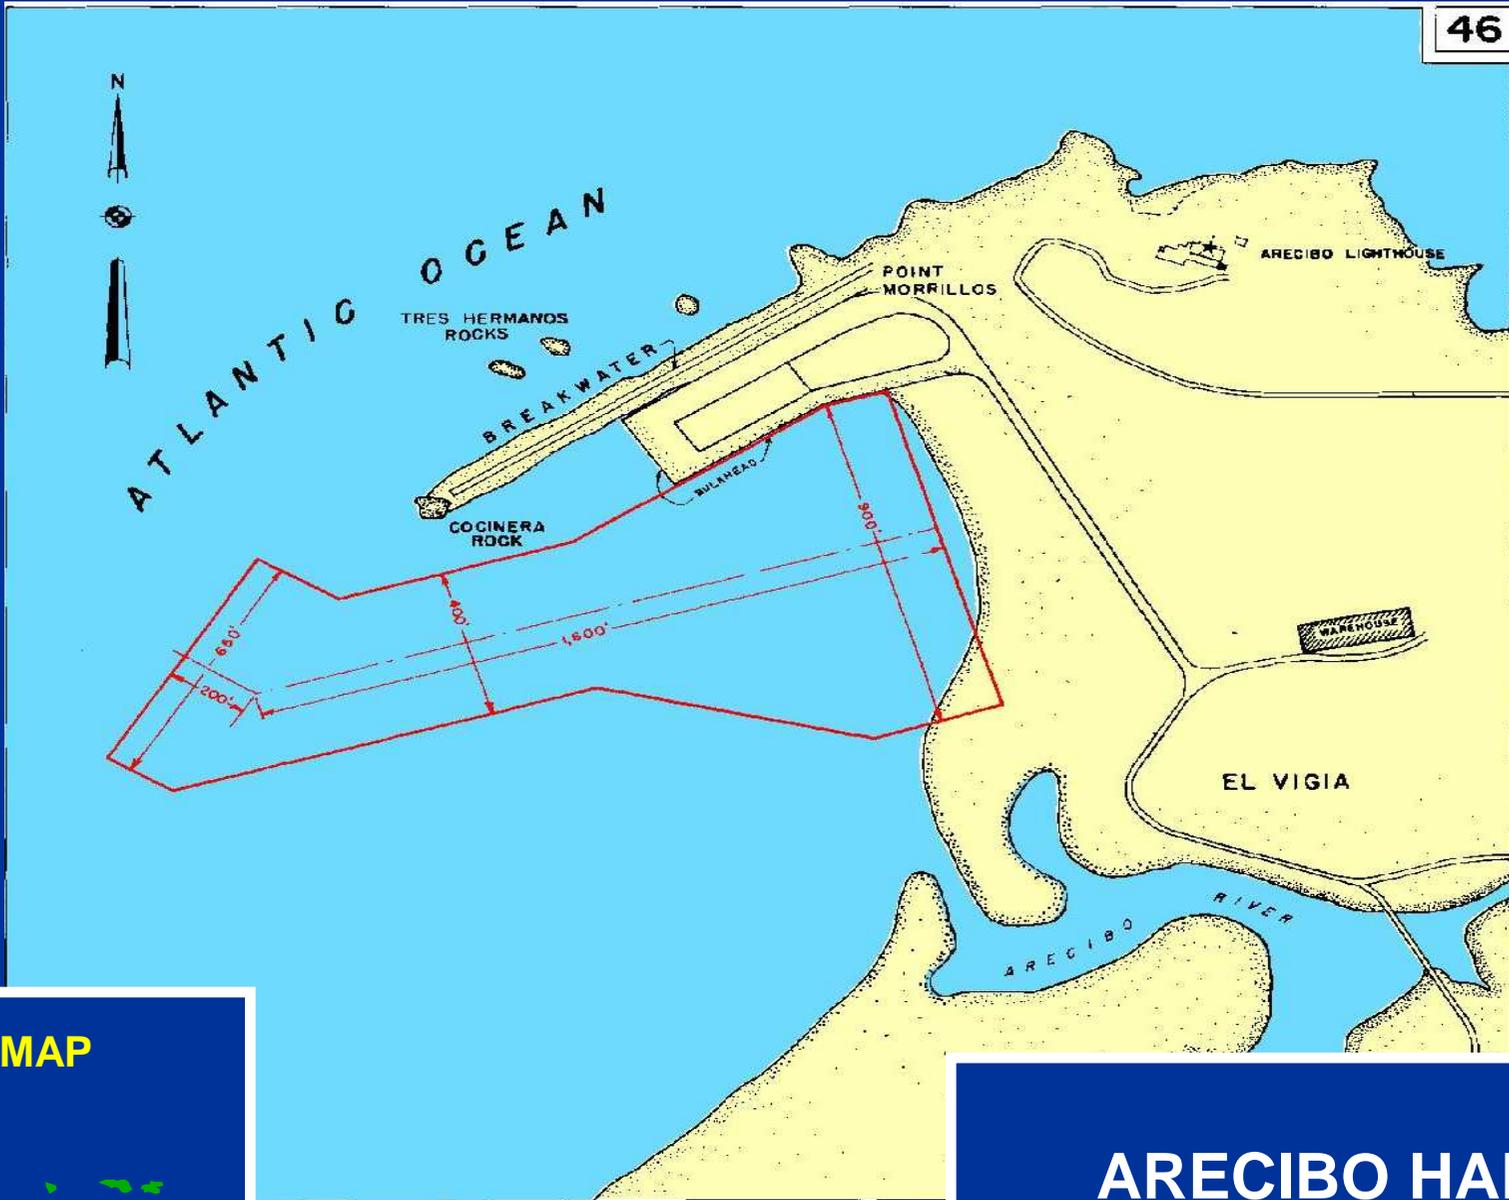

LOCATION MAP



**ARECIBO HARBOR
PUERTO RICO**