

FACT SHEET
COMPREHENSIVE EVERGLADES RESTORATION PLAN
Water Conservation Area 3 Decompartmentalization
and Sheetflow Enhancement-Part 1 Canal and Levee Modifications
Construction, General (C)
Congressional Districts: 18, 20, 21, 22, 23, 24, 25, 26, 27

1. DESCRIPTION

The Water Resources Development Act (WRDA) of 2000, Section 601 (b)(1)(A), authorized the Comprehensive Everglades Restoration Plan (CERP) as the framework for restoration of the south Florida ecosystem. The Water Conservation Area (WCA) 3 Decompartmentalization (Decomp) and Sheetflow Enhancement Project is one of the projects identified to be implemented as part of CERP. The purpose of this project is to restore sheetflow and reduce unnatural discontinuities in the Everglades landscape. The Decomp project includes the modification or removal of levees, canals, and water control structures in WCA 3A located in western Broward County. The project was originally envisioned to be completed in three project implementation reports (PIRs). PIR 1 and 2 will focus on those features described in the Restudy Decomp project Part 1, which were conditionally authorized, and PIR 3 will cover those identified in Part 2 in the Restudy. PIR 1 has been suspended and its restoration features have been incorporated into the Central Everglades Pilot Project (CEPP).

The Water Conservation Area 3 (WCA-3) Decompartmentalization and Sheetflow Enhancement (DECOMP) Physical Model (DPM) is a large-scale field test designed to answer uncertainties with depth, hydroperiod, sheetflow, and canal backfilling associated with the full-scale DECOMP project. The DPM will be located in Miami-Dade County along the southern end of the L-67A and L-67C canals within Water Conservation Area 3 (WCA-3) in a region referred to as the "pocket". The pocket is bounded to the northwest and the southeast by the L-67A and L-67C levee and canal systems respectively in Sections 3, 10 and 15, Township 53 South and Range 37 East.

The DPM includes installation and interim operations associated with the following features: ten controllable gated culverts within the L-67A Levee (S-152), degradation of 3,000 linear feet of the L- 67C levee and three, 1,000 ft backfill treatments in the L-67C canal (no backfill, partial backfill, and complete backfill). Scientific and water quality monitoring activities will be carried out to evaluate the uncertainties with depth, hydroperiod, sheetflow, and canal backfilling associated with the full-scale DECOMP project.

2. FUNDING

Estimated Total Cost	\$ 163,407,000
Estimated Federal Cost	89,415,000
Allocation thru FY 14	7,667,516
Carry In for FY 15	10,000
Allocation for FY 15	1,240,000
President's Budget FY 16	0

3. SPONSOR


South Florida Water Management District
3301 Gun Club Road
West Palm, Beach, Florida 33406

4. STATUS


The team has documented all work completed to date for PIR 1. The work completed for the PIR study was incorporated into the Central Everglades Pilot Program (CEPP).

A contract for the DPM was awarded in May 2012. Installation of the Physical Model began in May 2012 and was completed in November 2013. The DPM was successfully operated Nov-Dec 2013 and Nov-Dec 2014.

Sponsor requested a third operational cycle for FY 15. Funds were identified, and the DPM was successfully operated Nov 2014-Jan 2015. Information gained will be used to guide future restoration efforts.

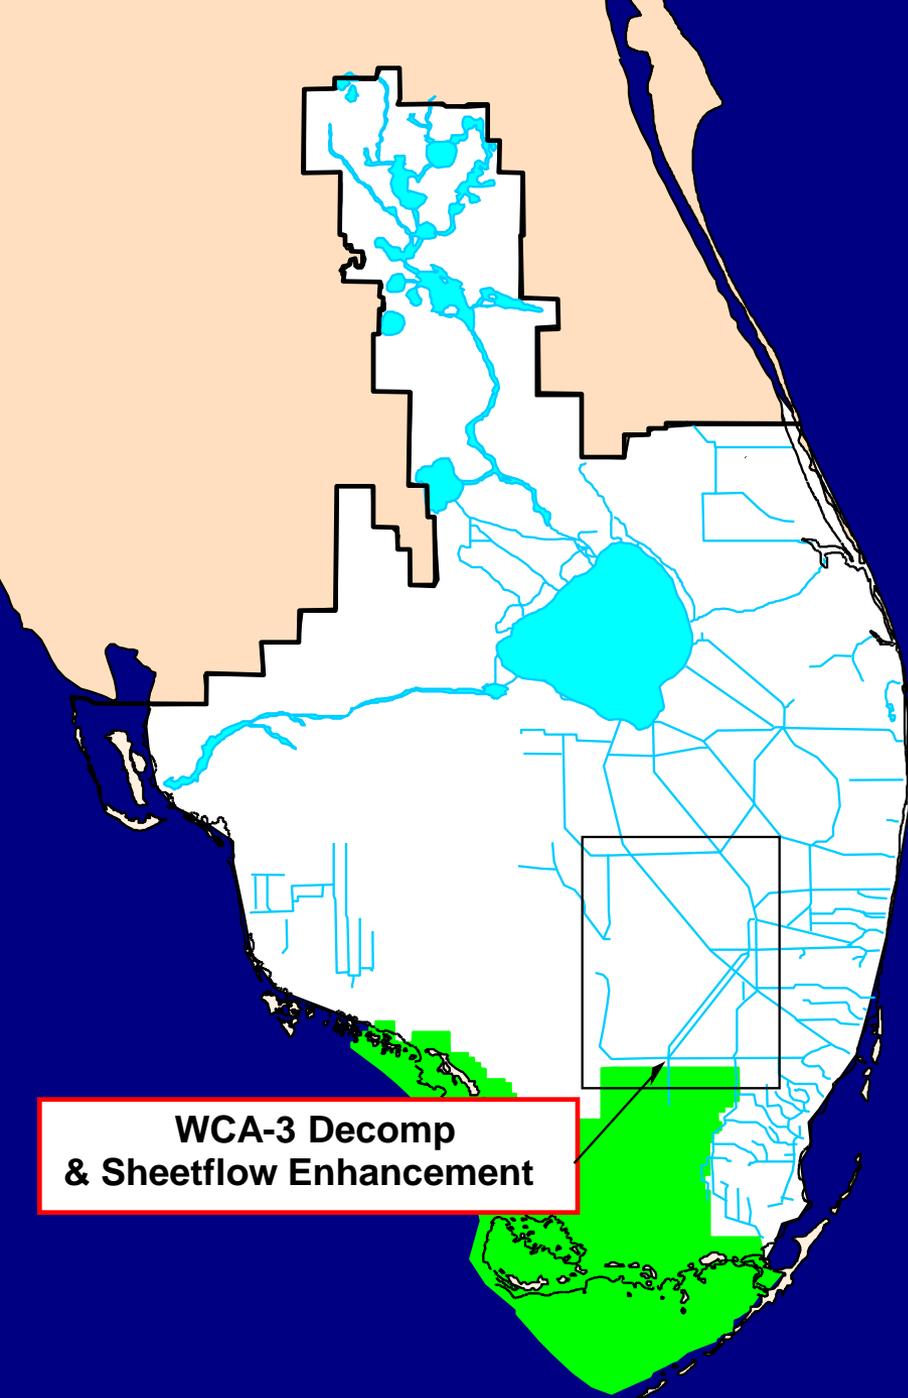

**WCA-3 Decomp
& Sheetflow Enhancement**

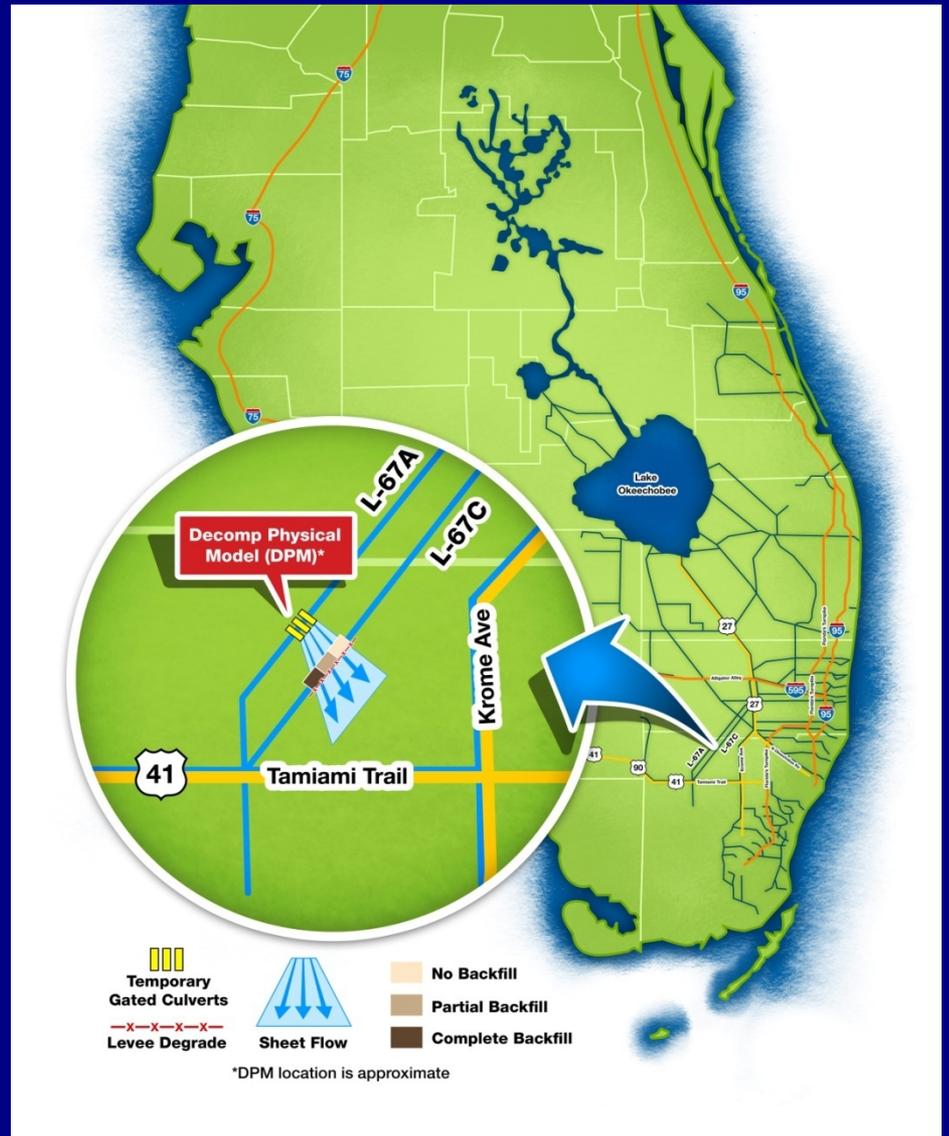

Study Area Map