

FACT SHEET  
**Naples to Big Marco Pass (O&M)**  
 Operations & Maintenance  
 Congressional Districts: 19, 25

**1. DESCRIPTION**

The project includes the southerly 10.15 miles of the waterway from Naples to Big Marco Pass and 4.5 miles of waterway from Naples to Gordon Pass. An interior channel 6 x 70 feet from southerly limits of the town of Naples to Big Marco Pass; a channel 12 x 150 feet from that depth in the Gulf to Gordon Pass, thence 10 x 100 feet through Gordon Pass and Naples Bay to a point 400 feet south of the U.S. 41 highway bridge, thence 10 x 70 feet to the bridge; and a turning basin 8 x 150 x 200 feet in upper Naples Bay; and a turning basin 8 x 250 x 670 feet at the municipal yacht basin.

**2. FUNDING**


Allocation for FY17	\$0
President's Budget FY18	\$TBD

**3. SPONSOR**

Collier County  
 3300 Santa Barbara Blvd.  
 Naples, Florida 34116

**4. STATUS**

Funds provided in the FY2016 work plan were used to award an Operation and Maintenance dredging contract in June 2016. The project consisted of dredging Cuts 1, 3, & 4. The project was completed in the fall of 2016 and removed 80,000 cubic yards of material from the Federal channel and placed on the beach at Keewaydin Island.

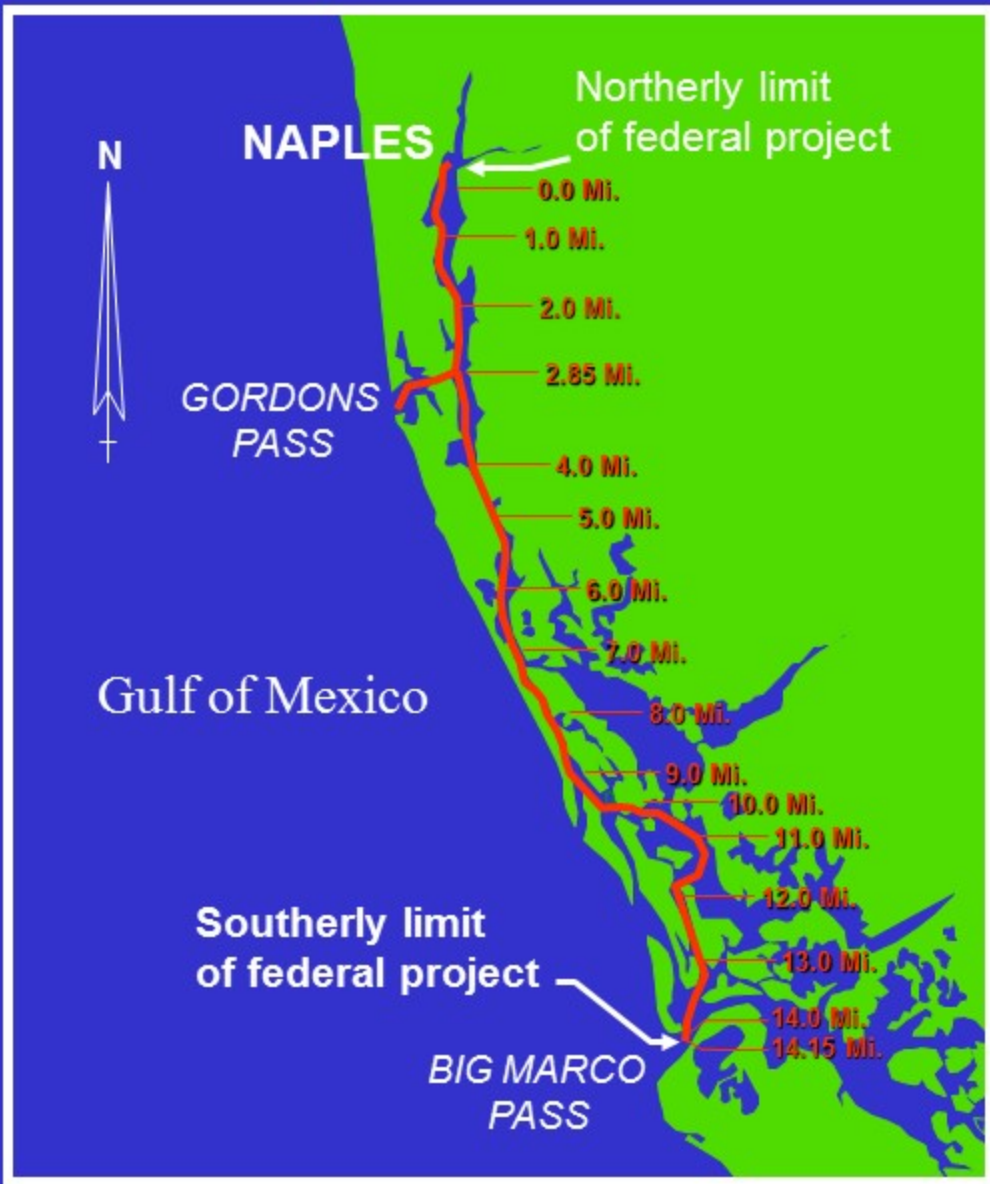

**CHANNEL FROM  
NAPLES TO BIG  
MARCO PASS  
Collier County**