


Xsection 3 of Acme STA  
Western Boundary  
Looking North

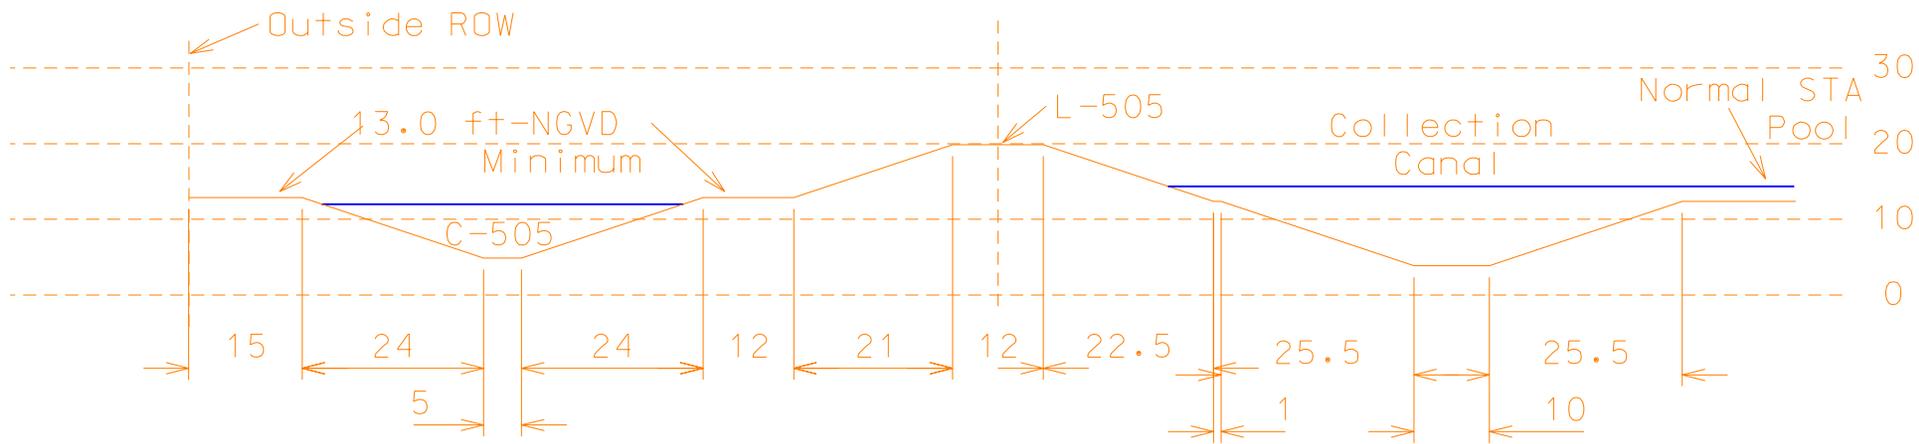

Design Elevations (ft-NGVD)  
 Top of Levee L-505 20.0  
 Maximum STA Pool 16.5  
 Normal STA Pool 14.0-15.0  
 Average STA Ground 12.5  
 Seepage Canal Optimum 11.8-12.0  
 Bottom of Seepage Canal 5.0  
 Bottom of Collection Canal 4.0

Preliminary Design Slopes  
 Outside Levee Slope = 1V:3H  
 Inside Levee Slope = 1V:3H  
 Seepage and Collection Canal Slope = 1V:3H