


Xsection 4 of L-511
 Western Level of C-11 Impoundment
 with seepage canal profile
 Looking North

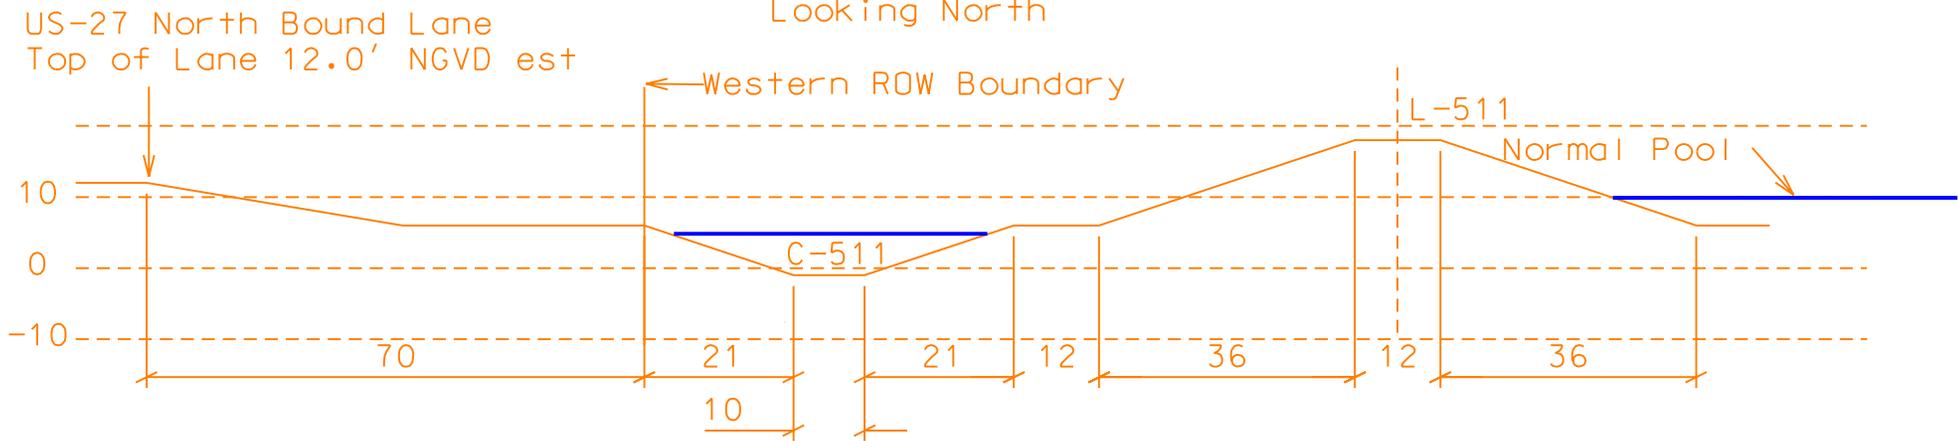

Design Elevations (ft-NGVD)
 Top of Levee 18.0
 Surcharge Pool 13.0
 Full Pool (Spillway Invert) 11.2
 Normal Pool 10.0
 Average Impoundment Ground 6.0
 Average Local Ground 6.0
 Seepage Canal Optimum 5.0
 Seepage Canal Bottom -1.0

Preliminary Design Slopes
 Outside Levee Slope = 1V:3H
 Inside Levee Slope = 1V:3H
 Seepage Canal Slope = 1V:3H