

FACT SHEET
Naples to Big Marco Pass (O&M)
 Operations & Maintenance
 Congressional District: 19, 25

1. DESCRIPTION

The project includes the southerly 10.15 miles of the waterway from Naples to Big Marco Pass and 4.5 miles of waterway from Naples to Gordon Pass. An interior channel 6 x 70 feet from southerly limits of the town of Naples to Big Marco Pass; a channel 12 x 150 feet from that depth in the Gulf to Gordon Pass, thence 10 x 100 feet through Gordon Pass and Naples Bay to a point 400 feet south of the U.S. 41 highway bridge, thence 10 x 70 feet to the bridge; and a turning basin 8 x 150 x 200 feet in upper Naples Bay; and a turning basin 8 x 250 x 670 feet at the municipal yacht basin.

2. FUNDING


Allocation for FY16	\$2,000,000
President's Budget FY17	\$0

3. SPONSOR

Collier County
 3300 Santa Barbara Blvd.
 Naples, Florida 34116

4. STATUS

NEPA analysis was completed and the state water quality certificate was acquired for Cuts 1, 2, 3 and 4 of Gordon Pass. FY14 Project Condition Surveys shows critical shoals in the entrance channel which is preventing safe navigation in the area. Allocations were provided in FY16 to conduct O&M dredging in Cuts 1, 2, 3, 4 and the settling basin of Gordon Pass. The scope of the project is currently being finalized.

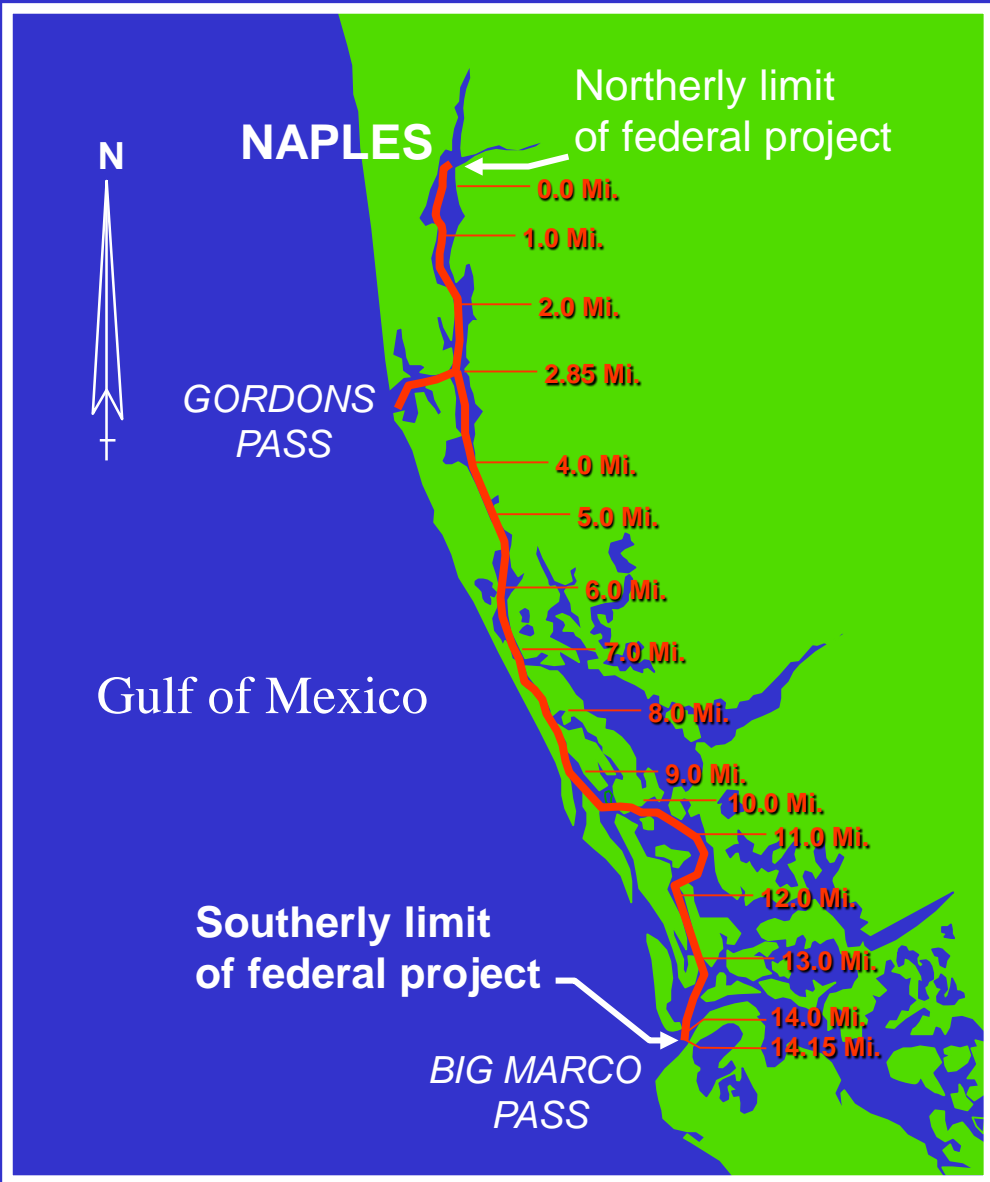

**CHANNEL FROM
NAPLES TO BIG
MARCO PASS
Collier County**